



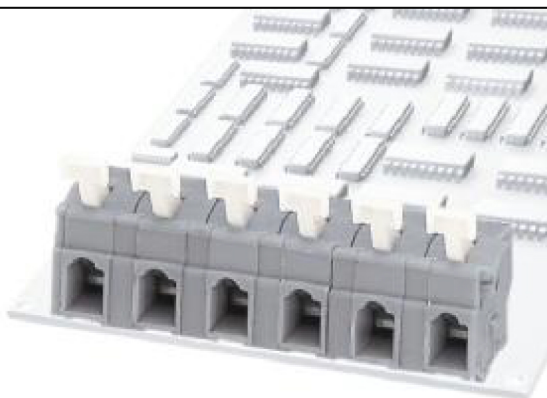

242R-7.5
242R-7.62

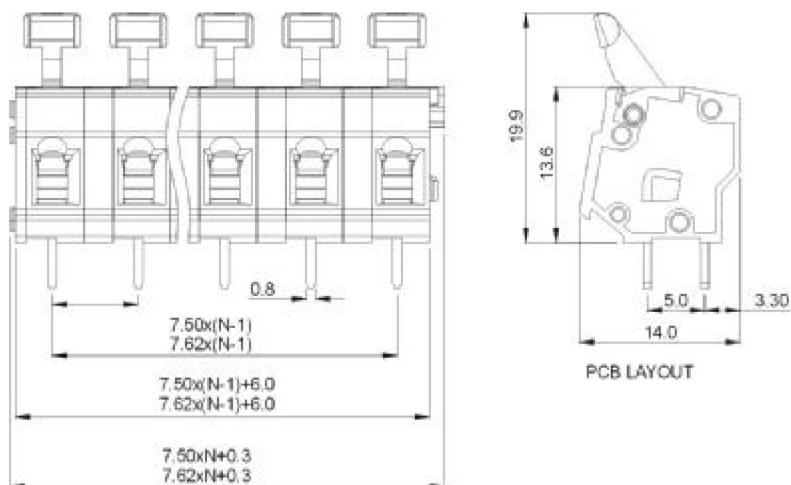

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

15A

28-12AWG

AC3000V/1Min

IEC

750V

17A

0.2-2.5mm²

Mechanical

Ambient temperature

Strip length

-40℃~+105℃

5-6mm

Dimensions

Pitch

Poles

7.5mm(.295") 7.62 (.300")

1P-XXP

Material

Housing

Pin header


Wire guard

PA66,UL94V-0

Phosphor bronze,Tin plated

Stainless steel

HOW TO ORDER :

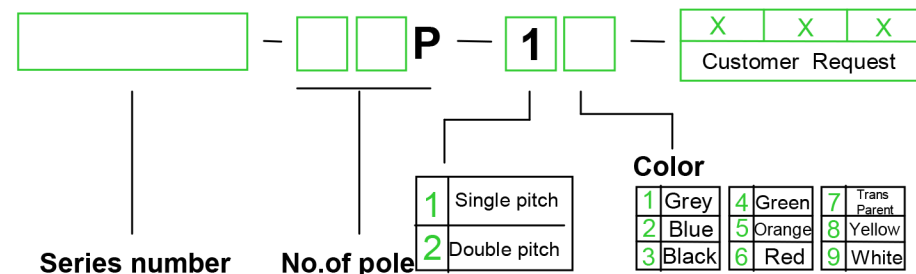

mm (INCH)	 China · Kang Wei electronics co., LTD
THIROANGLE PROJECTION	NAME 242R-7.5, 242R-7.62