


KV75GR-A



Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	29.30	42.30	55.30	68.30	81.30	94.30	107.30	120.30	133.30	146.30	159.30	172.30	185.30	198.30
S(mm)	13.00	26.00	39.00	52.00	65.00	78.00	91.00	104.00	117.00	130.00	143.00	156.00	169.00	182.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	211.30	224.30	237.30	250.30	263.30	276.30	289.30	302.30	315.30	328.30	341.30			
S(mm)	195.00	208.00	221.00	234.00	247.00	260.00	273.00	286.00	299.00	312.00	325.00			

Approval

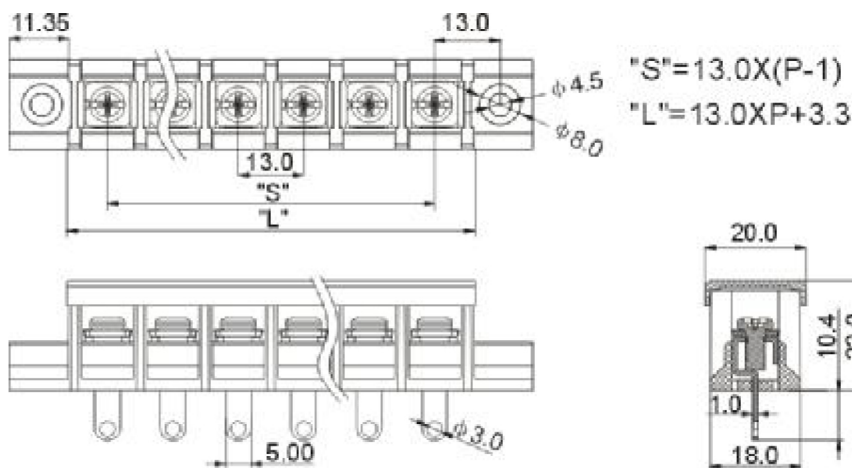

Electrical

Standard

Rated voltage

Rated current

Wire range

With standi

Insulation Resistance

Mechanical

Max. Torque

Ambient temperature

100

Dimensions

Pitch

Poles

Material

Housing

Terminal




Screws

PA66+23%GF,UL94V-0

Brass, 1.0t Tin plated

Steel,M4 Ni plated

HOW TO ORDER :

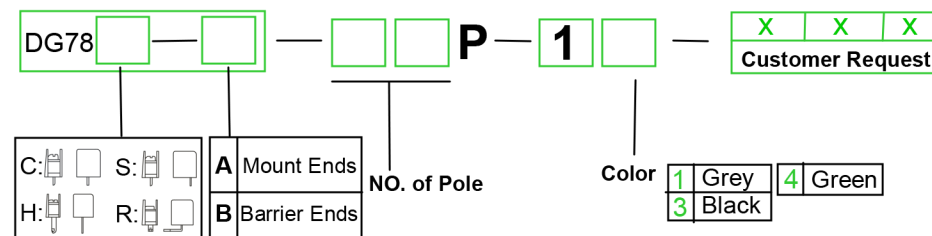

THROANGLE PROJECTION



 China · Kang Wei electronics co., LTD

NAME _____

KV75GR-A