

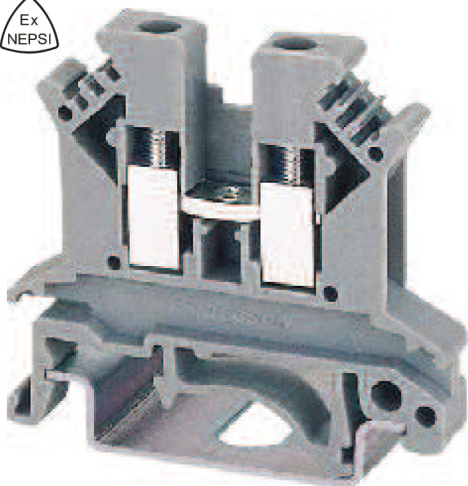




UK2.5B

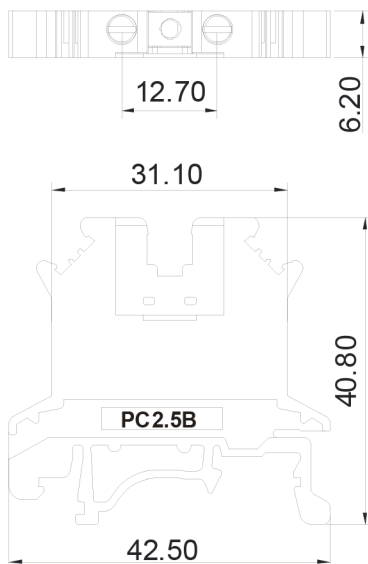

Approval


Capability

Standard	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm ²
T/W/End plate	6.2/42.5/1.5mm	
Height(mm)(NS35:7.5/NS35:15/NS32)	42/49.5/47mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	7mm	
Screw thread/Tightening torque	M3/0.5N.m/4.5Lb-in	
Internal cylindrical gage	A3	
Insulating Material/Inflammability class	PA/V-0	



HOW TO ORDER :

	-	P	-		-	<table border="1"> <tr> <td>X</td><td>X</td><td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request					
X	X	X													
Customer Request															
Series No.		No. of pole		Color		<table border="1"> <tr> <td>1 Gray</td><td>4 Green</td><td>7 Transp-arent</td> </tr> <tr> <td>2 Blue</td><td>5 Orange</td><td>8 Yellow</td> </tr> <tr> <td>3 Black</td><td>6 Red</td><td>9 white</td> </tr> </table>	1 Gray	4 Green	7 Transp-arent	2 Blue	5 Orange	8 Yellow	3 Black	6 Red	9 white
1 Gray	4 Green	7 Transp-arent													
2 Blue	5 Orange	8 Yellow													
3 Black	6 Red	9 white													



China · Kang Wei electronics co., LTD

NAME

UK2.5B