


康伟栅栏式PCB接线端子

产品规格书



KV46GR-B

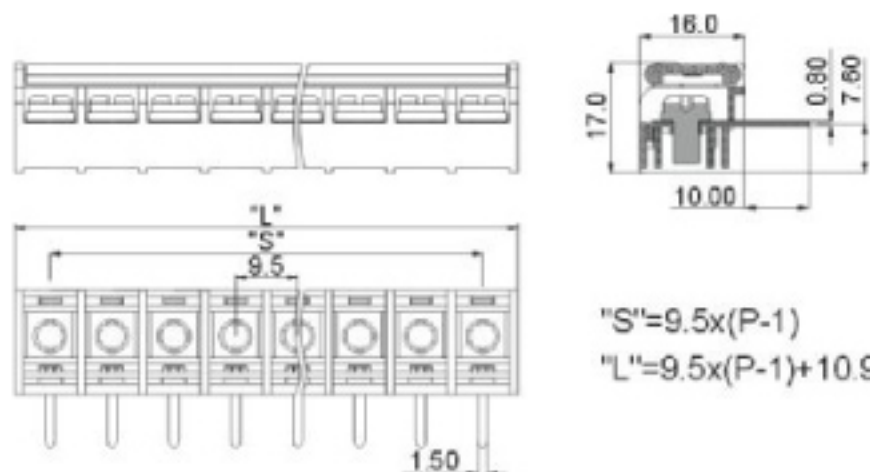


$$S = 9.5 \times (P-1)$$

$$L = 9.5 \times (P-1) + 10.9$$

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.40	29.90	39.40	48.90	58.40	67.90	77.40	86.90	96.40	105.90	115.40	124.90	134.40	143.90
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.40	162.90	172.40	181.90	191.40	200.90	210.40	219.90	229.40	238.90	248.40			
S(mm)	152.90	162.40	171.90	181.40	190.90	200.40	209.90	219.40	228.90	238.40	247.90			

认证	UL	CE
电气性能	UL	IEC
参考标准	300V	750V
额定电压	20A	32A
额定电流	22-12AWG	4.0mm ²
导线线径	AC2000V/1Min	
耐电压	500MΩ/DC500V	
绝缘阻抗	1.2Nm 10.6Lb.in	
机械性能	-40℃~+105℃	
最大锁紧扭力	9.5mm(.375")	
环境温度	2P-12P	
尺寸		
间距		
极数		
材质及电镀		
塑件	PA66, UL94V-0	
端子	黄铜, 0.8mm 镀锡	
螺丝	铜, M4镀锌	

订购方式:

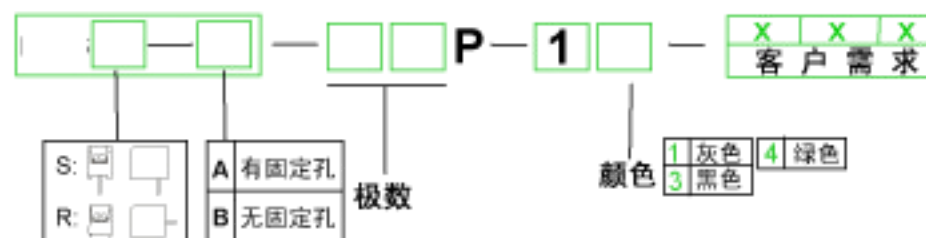

mm (inch)	中国·康伟电子有限公司
NAME	KV46GR-B